
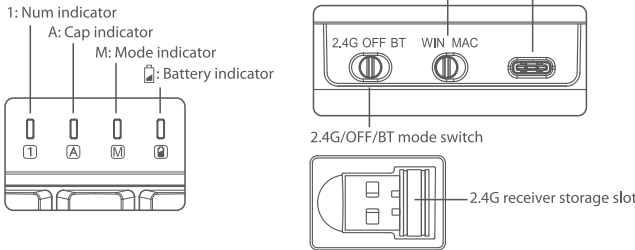


US UK

Dear user

Thank you for choosing REDRAGON product. To protect your rights and for better customer service, please read the following warranty rules carefully.

1. Within 18 months of purchase date, repair is guaranteed for failure due to electrical circuit problems. Other damages, such as disassembly, hard impacts, submersion into water, plugging into improper current or voltage, and damage caused by natural disasters such as fire, flood, or earthquake are not included.
2. Consumable parts (such as foot pads) and spare parts replacement are not included in our warranty.

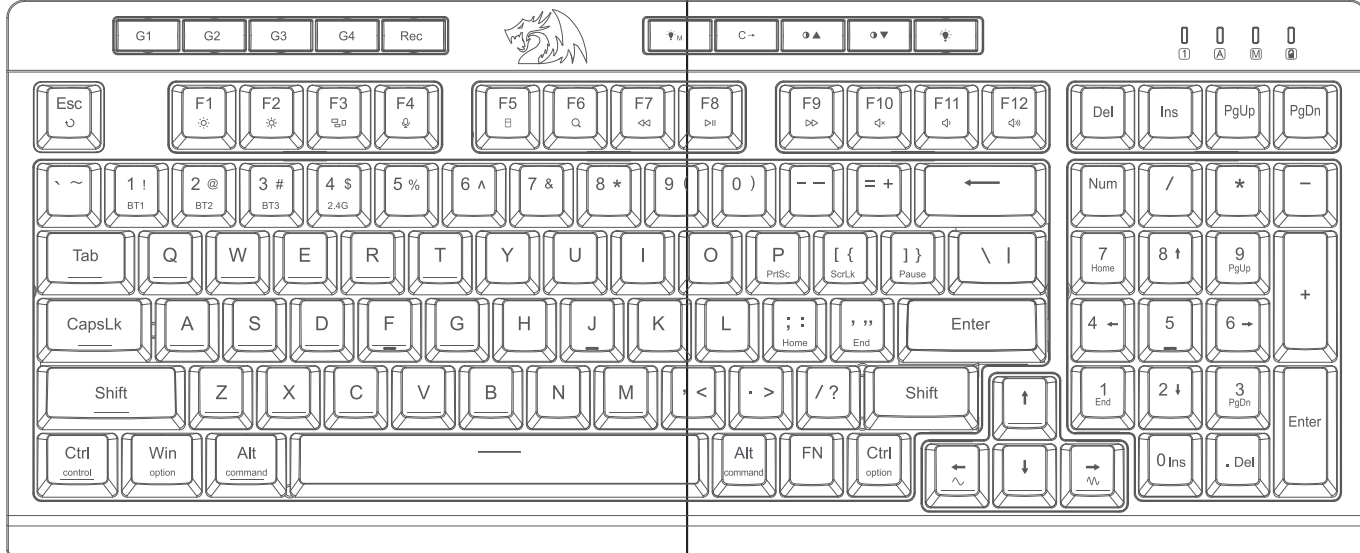

O.S. Support

Windows XP/Vista/Win 7/Win 8/Win 10/Win 11/Mac O.S.

How to connect the keyboard with multiple devices

Wired Connection

1. 2.4G/OFF/BT switch on "OFF".
2. Connect the keyboard to computer with USB cable.
3. The computer will recognize and configure the keyboard automatically.

2.4G Wireless Connection

1. 2.4G/OFF/BT switch on "2.4G"; the LED will flash in Yellow, plug the USB receiver into your computer USB port, the keyboard will connect with computer automatically.
2. If auto-connection unsuccessfully, or you want to connect to new device, plug out the USB receiver, press and hold [FN]+[4] for 3 seconds, the LED will flash in Yellow, plug the USB receiver into computer USB port, after paired the LED will turn to steady on.

BT Connection

1. 2.4G/OFF/BT switch on "BT".
2. Press and hold [FN]+[1/2/3] for 3 seconds, the LED will flash in Blue[1] or Cyan[2] or Pink[3] quickly.
3. Turn on BT function and searching for available devices. It will find "BT3.0 Keyboard and BT5.0 Keyboard" device names. Select a BT name to pair, after paired the LED will turn to steady on.
4. To switch the BT connections between BT1/BT2/BT3, press [FN]+[1/2/3].

Product Features

1. Press [FN]+[] to cycling switch the default 8 backlight patterns, press [FN]+[] to turn ON/OFF the backlight.
2. Press [FN]+[] to adjust light rotating speed, total 5 levels. Press []/[] to adjust backlight brightness, total 5 levels.
3. Backlight color switching: Press [] to cycling switch Red, Green, Blue, Yellow, Purple, Cyan, White, RGB.

Macro record

- To record macro setting, please use wired connection mode, on BT connection mode, the macro unavailable.
1. Press [Rec] button to start macro recording, LED 1 and A will flash slowly.
 2. Press [G1-G4] to select a profile to record macro, LED 1 and A will flash quickly. Press the key you want to record into macro (backlighting shortcut keys are not included), K515RGB-PRO supporting max 25 keys macro recording.
 3. After finished macro key recording, Press [Rec] to save the macro.
- To output the macro, Press [G1-G4] to output the macro.

Delete recorded macro setting:

Delete all macro setting: Press& hold [FN]+[Rec] for 5s, LED 1 and A will flash 3 times, all macro setting was deleted.

Delete partial macro setting: Press [Rec], LED 1 and A flash slowly, press the [G] key you

want to delete macro, LED 1 and A flash quickly, Press [Rec] again, the macro setting was deleted.

[WIN] lock

Press [FN] + [WIN] to lock [WIN] key, repeat to unlock (DO NOT lock the key when using on MAC O.S.)

Windows / MAC shortcut keys switching

Use MAC/WIN switch on the front side of keyboard.

Commands of key combinations with [FN] key

WINDOWS O.S.	MAC O.S.
FN+F1: Screen brightness -	F1: Screen brightness -/ FN+F1=F1
FN+F2: Screen brightness +	F2: Screen brightness +/ FN+F2=F2
FN+F3: Multiple windows	F3: Multiple task / FN+F3=F3
FN+F4: Speech recognition(O.S. win10 or newer)	F4: Siri / FN+F4=F4
FN+F5: Show desktop	F5: Show desktop / FN+F5=F5
FN+F6: Search	F6: Search / FN+F6=F6
FN+F7: Pre track	F7: Pre track / FN+F7=F7
FN+F8: Play/Pause	F8: Play/Pause / FN+F8=F8
FN+F9: Next track	F9: Next track / FN+F9=F9
FN+F10: Mute	F10: Mute / FN+F10=F10
FN+F11: Volume -	F11: Volume down / FN+F11=F11
FN+F12: Volume +	F12: Volume up / FN+F12=F12
FN+P: PrtSC	
FN + []: ScrLK	
FN + []: Pause	
FN + []: Home	
FN + []: End	

Restore factory settings

Press and hold [FN] + [ESC] for 3 seconds.

Power save mode & How to recharge

On wireless/BT connection mode, when keyboard without any operation over 3 minutes, the keyboard backlight will turn off to save the battery, when keyboard without any operation over 30 minutes, the keyboard will enter power save mode, press any key to wake up.

When battery is low, the backlight will turn off, the power LED will blink red slowly when pressed a key.

Connect the keyboard with computer for charging, the power LED will steady on Red when charging, after fully charged turn to steady on Green.

Battery power indicator: Press and hold [FN] + [INS] to show the battery level, release to back to current backlight mode.

Warning: Charging Input: 5V==2A

Built-in Li-thion battery 1 unit

FAQ

1. If the keyboard doesn't respond, please check if the keyboards USB cable is correctly inserted into the corresponding USB port on the computer, or try another USB port on the computer.
2. If you spill liquid on the keyboard, please unplug the keyboards USB cable from the computer immediately. Wipe off excess liquid and put the keyboard in a dry and ventilated place. Make sure the keyboard is dried naturally before the next use.



BATTERY SAFETY GUIDELINES

DO NOT replace the battery with a different model.
DO NOT use this product if the battery shows signs of damage including, but not limited to tearing, deformation, leakage, or the smell of electrolytic material.
DO NOT touch the battery if material is leaking and seek immediate medical attention if any material comes into contact with your skin or eyes.
DO NOT expose the battery to liquid, heat sources, electricity (outside of the product itself), or other non-standard operating condition.
DO NOT remove the battery except for proper disposal and recycling as required by local laws and regulations.
DO NOT impact, bend, alter, disassemble, or otherwise damage the battery as the contents are volatile, hazardous, and can be harmful.

CAUTION:

Failing to follow all safety guidelines may result product damage, explosion, fire, and/or electric shock.

This device contains licence-exempt transmitter(s)

(receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation of the device.



Cet appareil contient des émetteurs / récepteurs exempts de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes : (1) Cet appareil ne doit pas causer d'interférences. (2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement indésirable de l'appareil.

PT

Prezado usuário,

Obrigado por escolher a marca REDRAGON. Para proteger seus direitos e oferecer um melhor atendimento ao cliente, pedimos que você observe as regras da nossa garantia.

1. Dentro do período da garantia, os reparos são garantidos nos casos de falha devido a problemas no circuito elétrico. Danos causados pela desmontagem, por impactos violentos, imersão em água, ligação em correntes ou voltagens incorretas e danos causados por desastres naturais, como incêndios, inundações ou terremotos, não estão incluídos.
2. Peças que sofrem desgaste (como pés) e a substituição de peças avulsas não estão incluídas em nossa garantia.

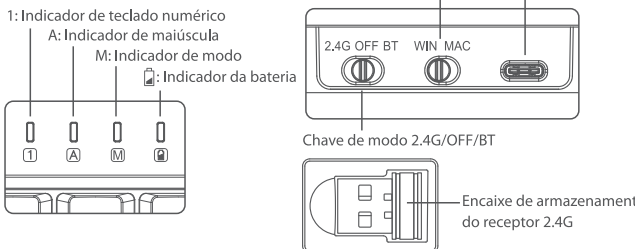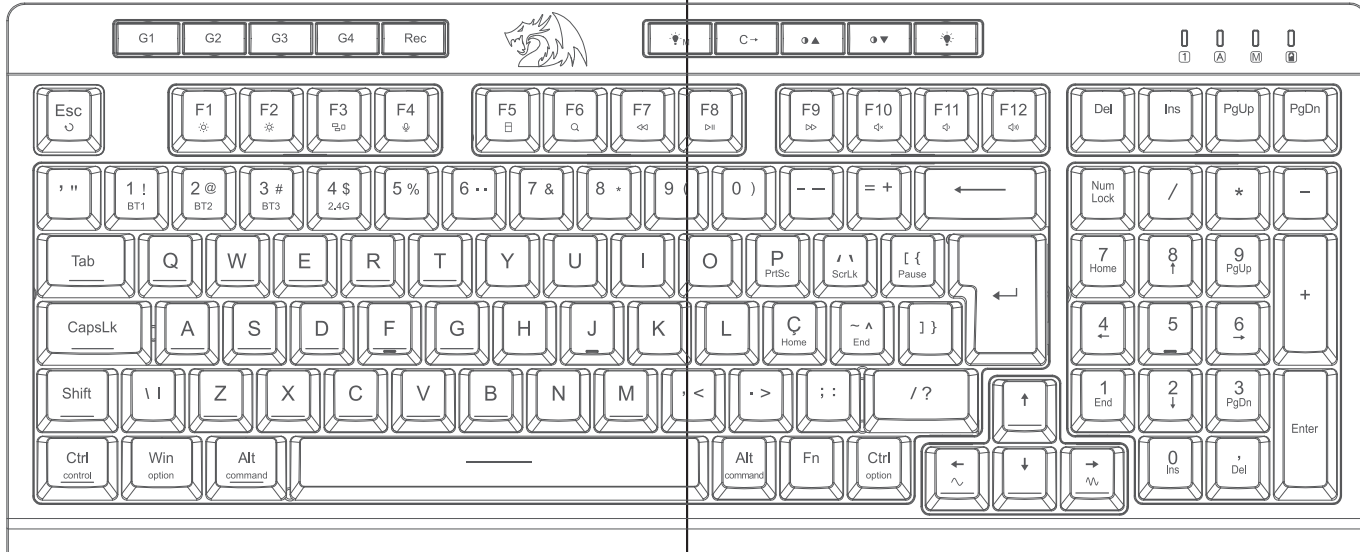

Compatibilidade com SO

Windows XP/Vista/Win 7/Win 8/Win 10/Win 11/Mac O.S.

Como conectar o teclado com vários dispositivos

Conexão com fio

1. Interruptor 2.4G/OFF/BT em "OFF".
2. Conecte o teclado ao computador com o cabo USB.
3. O computador reconhecerá e configurará o teclado automaticamente.

Conexão sem fio 2.4G

1. Interruptor 2.4G/OFF/BT em "2.4G", o LED piscará em amarelo, conecte o receptor USB na porta USB do seu computador, o teclado se conectará ao computador automaticamente.
2. Se a conexão automática não for bem-sucedida ou se você quiser conectar a um novo dispositivo, desconecte o receptor USB, segure [FN]+[4] por 3 segundos, o LED piscará em amarelo, conecte o receptor USB na porta USB do computador e, após o pareamento, o LED ficará aceso.

Conexão BT

1. Interruptor 2.4G/OFF/BT em "BT".
2. Segure [FN]+[1/2/3] por 3 segundos, o LED 1 e A piscarão rapidamente.
3. Ligue a função BT e procure por dispositivos disponíveis. Ele encontrará os nomes dos dispositivos "BT3.0 Keyboard e BT5.0 Keyboard". Selecione um nome BT para parear. Após o pareamento, o LED ficará aceso continuamente.
4. Para alternar as conexões BT entre BT1/BT2/BT3, pressione [FN]+[1/2/3].

Características do Produto

Luz de fundo

1. Pressione [FN]+[] para alternar os 8 padrões de luz de fundo padrão e pressione [] para ligar/desligar a luz de fundo.
2. Pressione [FN]+[] para ajustar a velocidade de rotação da luz, totalizando 5 níveis. Pressione []/[] para ajustar o brilho da luz de fundo, totalizando 5 níveis.
3. Alterar a cor da luz de fundo: Pressione [] para alternar entre Vermelho, Verde, Azul, Amarelo, Roxo, Ciano, Branco, RGB.

Gravação de macro

- Para gravar a configuração macro, use o modo de conexão com fio. Na conexão sem fio 2.4G, só é suportada a saída macro. No modo de conexão BT, a macro não está disponível.
1. Pressione o botão [Rec] para iniciar a gravação da macro e os LEDs 1 e A piscarão lentamente.
 2. Pressione [G1-G4] para selecionar um perfil para gravar macro e o LED 1 e A piscarão rapidamente. Pressione a tecla que deseja gravar em macro (teclas de atalho com luz de fundo não estão incluídas). O K515RGB-PRO suporta gravação de macro com no máximo 25 teclas.
 3. Após terminar a gravação da tecla macro, pressione [Rec] para salvar a macro. Para emitir a macro, pressione [G1-G4] para emitir a macro.

Excluir configuração de macro gravada:

Excluir todas as configurações de macro: Segure [FN]+[Rec] por 5s, o LED 1 e A piscarão 3 vezes e todas as configurações de macro serão excluídas.

Excluir configuração parcial da macro: Pressione [Rec], o LED 1 e A piscam lentamente, pressione a tecla [G] para excluir a macro e o LED 1 e A piscam rapidamente. Pressione [Rec] novamente e a configuração da macro será excluída.

Bloqueio [WIN]

Pressione [FN] + [WIN] para bloquear a tecla [WIN] e repita para desbloquear (NÃO bloqueie a tecla ao usar no sistema operativo MAC).

Troca de teclas de atalho do Windows/MAC

Use a tecla MAC/WIN na parte frontal do teclado.

Comandos de combinações de teclas com a tecla [FN]

Sistema operativo WINDOWS	Sistema operativo MAC
FN+F1: Brilho da tela -	F1: Brilho da tela -/ FN+F1=F1
FN+F2: Brilho da tela +	F2: Brilho da tela +/ FN+F2=F2
FN+F3: Várias janelas	F3: Tarefa múltipla / FN+F3=F3
FN+F4: Reconhecimento de fala (sistema operativo win10 ou mais recente)	F4: Siri / FN+F4=F4
FN+F5: Mostrar área de trabalho	F5: Mostrar área de trabalho / FN+F5=F5
FN+F6: Pesquisar	F6: Pesquisar / FN+F6=F6
FN+F7: Faixa anterior	F7: Faixa anterior / FN+F7=F7
FN+F8: Reproduzir/pausar	F8: Reproduzir/pausar / FN+F8=F8
FN+F9: Faixa seguinte	F9: Faixa seguinte / FN+F9=F9
FN+F10: Silenciar	F10: Silenciar / FN+F10=F10

FN+F11: Volume -	F11: Diminuir o volume / FN+F11=F11
FN+F12: Volume +	F12: Aumentar o volume / FN+F12=F12
FN+P: PrtSC	
FN + []: ScrLK	
FN + []: Pausar	
FN + []: Início	
FN + []: Fim	

Repor valores de origem

Segure [FN] + [ESC] por 3 segundos.

Modo de economia de energia e como recarregar

No modo de conexão sem fio/BT, quando o teclado não for operado por mais de 3 minutos, a luz de fundo do teclado será desligada para economizar bateria. Quando o teclado não for operado por mais de 30 minutos, o teclado entrará no modo de economia de energia. Pressione qualquer tecla para ativar.

Quando a bateria estiver fraca, a luz de fundo será desligada e o LED de energia piscará lentamente em vermelho para lembrar o usuário de carregar o teclado.

Conecte o teclado ao computador para carregar, o LED de energia ficará vermelho durante o carregamento e, após a carga completa, ele desligará.

Aviso: corrente de carga: 5V == 2A máx
Bateria de íon de lítio embutida, 1 unidade



REDRAGON SHIVA PRO 98
REDRAGON 3 MODES CONNECTIONS
BACKLIGHTING GAMING KEYBOARD



Please scan here to download user manual

Mechanical Gaming Keyboard
User manual

封面

型号	K515RGB-PRO/7183	备注：尺寸：100x100mm (折页) 材质：80g书写纸 印刷：单黑色双面印刷		文件编号		版本	
名称	说明书						
日期	2025-2-26(修改)						
页码	1 OF 1						
绘图	雷国建	审核	香敏琪	核准			A.1

