


QUICK START GUIDE

FBK11 / FBKS11



WHAT'S IN THE BOX

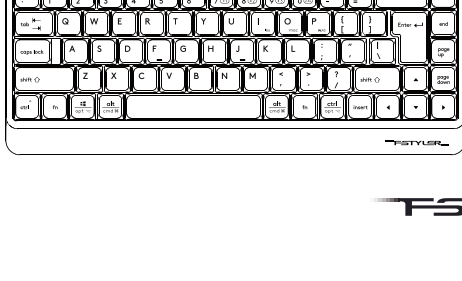

Bluetooth/2.4G
Wireless Keyboard



2.4G Nano
Receiver



USB Extension
Cable



2 AAA Alkaline
Batteries



User
Manual

THE FRONT



FN Locking Mode



12 Multimedia &
Internet Hotkeys

Multi-Device Switch

Operating System Swap

PC/MAC Dual-Function Keys

THE FLANK / BOTTOM




Power Switch




Battery Storage

CONNECTING 2.4G DEVICE




①

Plug the receiver into
the computer's USB port.



②

Turn on the keyboard
power switch.



③ Indicator

Yellow light will be solid (10S).
The light will be off after connected.

Note: USB extension cable is recommended to connect with Nano receiver.
(Make sure the keyboard is closed to the receiver within 30 cm)

CONNECTING BLUETOOTH DEVICE 1 (For Mobile Phone/Tablet/Laptop)



1: Short-press FN+7 and choose Bluetooth device 1 and light up in blue.
Long-press FN+7 for 3S and blue light flashes slowly when pairing.
2: Choose [A4 FBK11] from your Bluetooth device.
The indicator will be solid blue for a while then light off after the keyboard is connected.

CONNECTING BLUETOOTH DEVICE 2 (For Mobile Phone/Tablet/Laptop)



1: Short-press FN+8 and choose Bluetooth device 2 and light up in green.
Long-press FN+8 for 3S and green light flashes slowly when pairing.
2: Choose [A4 FBK11] from your Bluetooth device.
The indicator will be solid green for a while then light off after the keyboard is connected.

CONNECTING BLUETOOTH DEVICE 3 (For Mobile Phone/Tablet/Laptop)



1: Short-press FN+9 and choose Bluetooth device 3 and light up in purple.
Long-press FN+9 for 3S and purple light flashes slowly when pairing.
2: Choose [A4 FBK11] from your Bluetooth device.
The indicator will be solid purple for a while then light off after the keyboard is connected.

OPERATING SYSTEM SWAP




Windows / Android is default system layout.

System	Shortcut [Long-Press for 3S]	Device / Layout Indicator
iOS	fn + ios	Light will be off after flashing.
Mac	fn + mac	
Windows, Chrome, Android & HarmonyOS	fn + P/w/a	

Note: The layout you used last time will be remembered. You can switch the layout by following the above step.

INDICATOR (For Mobile Phone/Tablet/Laptop)



Indicator	Yellow Light	Blue Light	Green Light	Purple Light
Multi-Device Switch	fn + 0	fn + 7	fn + 8	fn + 9
Device Switch: Short-Press for 1S	Solid Light 5S	Solid Light 5S		
Pair Device: Long-Press for 3S	No Need to Pair	Pairing: Flashes Slowly Connected: Solid Light 10S		

FN MULTIMEDIA KEY COMBINATION SWITCH




FN Mode: You can lock & unlock Fn mode by short pressing FN + ESC by turn.



① Lock Fn Mode: No need to press FN key
② Unlock Fn Mode: FN + ESC

※ After pairing, FN shortcut is locked in FN mode by default,
and the locking FN is memorized when switching and shutting down.



Windows / Android / Mac / iOS

OTHER FN SHORTCUTS SWITCH

Shortcuts	Windows	Android	Mac / iOS
fn + delete	Pause	Pause	Pause
fn + up	Device Screen Brightness +	Device Screen Brightness +	Device Screen Brightness +
fn + down	Device Screen Brightness -	Device Screen Brightness -	Device Screen Brightness -
fn + Backspace		Screen Lock	Screen Lock (iOS Only)
fn + Enter	Scroll Lock	Scroll Lock	

Note: The final function refer to the actual system.


DUAL-FUNCTION KEY



Multi-System Layout

Keyboard Layout	Windows / Android (W / a)	iOS / Mac (ios / mac)
fn + ios / mac / P/w/a	Switching Steps: ① Choose iOS layout by pressing Fn+I. ② Choose MAC layout by pressing Fn+O ③ Choose Windows / Android layout by pressing Fn+P.	
ctrl ^	Ctrl	Control ^
opt ⌘	Start	Option ~
alt cmd	Alt	Command
alt cmd	Alt (Right)	Command
alt opt	Ctrl (Right)	Option ~

LOW BATTERY INDICATOR



Flashing Red light when the battery is below 10%.

SPECIFICATIONS



Connection: Bluetooth / 2.4G
Operating Range: 5~10 M
Multi-Device: 4 Devices (Bluetooth x 3, 2.4G x 1)
Layout: Windows | Android | Mac | iOS
Battery: 2 AAA Alkaline Batteries
Battery Life: about 650H (12 Months)
Receiver: Nano USB Receiver
Includes: Keyboard, Nano Receiver, 2 AAA Alkaline Batteries,
USB Extension Cable, User Manual
System Platform: Windows / Mac / iOS / Chrome / Android / Harmony OS...

Q & A



Question How to switch layout under different system?

Answer You can switch layout by pressing Fn + I / O / P under Windows | Android | Mac | iOS.

Question Does the layout can be remembered?

Answer The layout you used last time will be remembered.

Question How many devices can be connected?

Answer Interchange and connect up to 4 devices at the same time.

Question Does the keyboard remember the connected device?

Answer The device you connected last time will be remembered.

Question How can I know the current device is connected or not?

Answer When you turn on your device, the device indicator will be solid.
(disconnected: 5S, connected: 10S)

Question How to switch between connected Bluetooth device 1-3?

Answer By pressing FN + Bluetooth shortcut (7 - 9).

WARNING STATEMENT

The following actions may damage the product.

1. To disassemble, bump, crush, or throw into fire is forbidden for the battery.
2. Do not expose under the strong sunlight or high temperature.
3. The discard of battery should obey to the local law, if possible please recycle it.
Do not dispose it as household garbage, because it may cause an explosion.
4. Do not continue to use if severe swelling occurs.
5. Please do not charge the battery.



www.a4tech.com



Scan for E-Manual