



WHAT'S IN THE BOX




Bluetooth/2.4G
Wireless Keyboard



2.4G Nano
Receiver



1 AA
Alkaline Battery



User
Manual



USB Type-C
Adaptor




USB Extension
Cable

THE FRONT



- 1 FN Locking Mode
- 2 12 Multimedia & Internet Hotkeys
- 3 Multi-Device Switch
- 4 Operating System Swap
- 5 PC/MAC Dual-Function Keys

THE BOTTOM

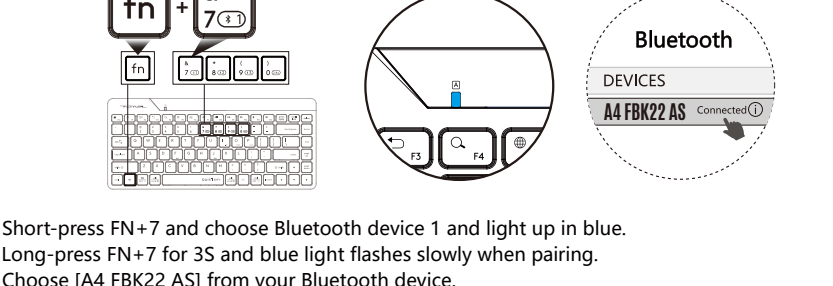

Power Switch

Receiver Storage


Battery Storage

CONNECTING BLUETOOTH DEVICE 1 (For Mobile Phone/Tablet/Laptop)




- 1: Short-press FN+7 and choose Bluetooth device 1 and light up in blue.
Long-press FN+7 for 3S and blue light flashes slowly when pairing.
- 2: Choose [A4 FBK22 AS] from your Bluetooth device.
The indicator will be solid blue for a while then light off after the keyboard is connected.

CONNECTING BLUETOOTH DEVICE 2 (For Mobile Phone/Tablet/Laptop)

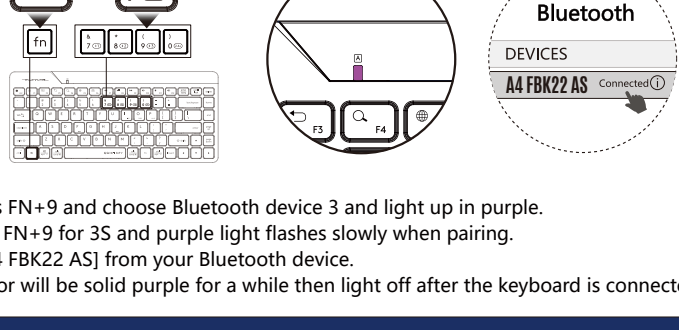


- 1: Short-press FN+8 and choose Bluetooth device 2 and light up in green.
Long-press FN+8 for 3S and green light flashes slowly when pairing.
- 2: Choose [A4 FBK22 AS] from your Bluetooth device.
The indicator will be solid green for a while then light off after the keyboard is connected.

CONNECTING BLUETOOTH DEVICE 3 (For Mobile Phone/Tablet/Laptop)

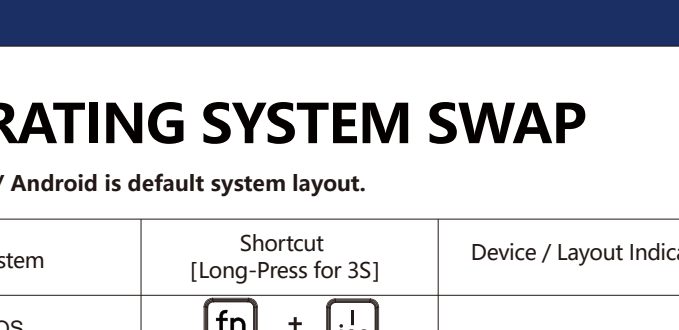

- 1: Short-press FN+9 and choose Bluetooth device 3 and light up in purple.
Long-press FN+9 for 3S and purple light flashes slowly when pairing.
- 2: Choose [A4 FBK22 AS] from your Bluetooth device.
The indicator will be solid purple for a while then light off after the keyboard is connected.

CONNECTING 2.4G DEVICE

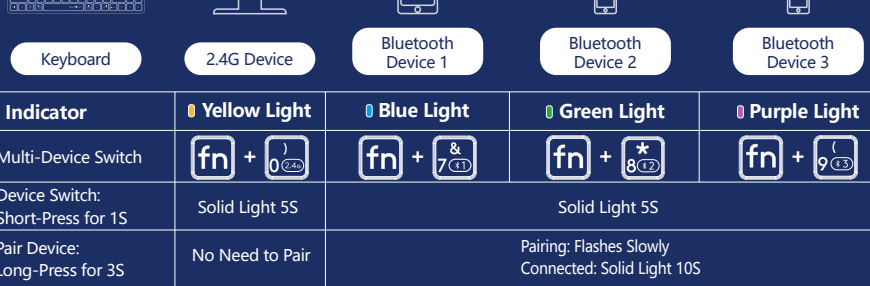

- 1 Plug the receiver into the computer's USB port.
- 2 Use the Type-C adaptor to connect the receiver with the computer's Type-C port.

Turn on the keyboard power switch.
Yellow light will be solid (10S).
The light will be off after connected.

OPERATING SYSTEM SWAP

Windows / Android is default system layout.

System	Shortcut [Long-Press for 3S]	Device / Layout Indicator
iOS	fn + [ios]	Light will be off after flashing.
Mac	fn + [mac]	
Windows & Android	fn + [P w/a]	

Note: The layout you used last time will be remembered. You can switch the layout by following the above step.

INDICATOR (For Mobile Phone/Tablet/Laptop)

Indicator	Yellow Light	Blue Light	Green Light	Purple Light
Multi-Device Switch	fn + [0 03]	fn + [7 03]	fn + [8 03]	fn + [9 03]
Device Switch: Short-Press for 1S	Solid Light 5S	Solid Light 5S	Solid Light 5S	Solid Light 5S
Pair Device: Long-Press for 3S	No Need to Pair		Pairing: Flashes Slowly Connected: Solid Light 10S	

ANTI-SLEEP SETTING MODE

Note: Supports 2.4G Mode Only

To prevent your PC from entering the sleep-mode setting while you are away from your desk, simply turn on our new Anti-Sleep Setting Mode for PC. It will automatically simulate the cursor movement once you turn it on. Now you may take an hour nap while downloading your favorite movie.



FN MULTIMEDIA KEY COMBINATION SWITCH

FN Mode: You can lock & unlock FN mode by short pressing FN + ESC by turn.

- 1 Lock FN Mode: No need to press FN key
- 2 Unlock FN Mode: FN + ESC

※ After pairing, FN shortcut is locked in FN mode by default, and the locking FN is memorized when switching and shutting down.

F1	F2	F3	F4	F5	F6	F7	F8	F9	F10	F11	F12
Home Page	System Switching	Backward	Search	Input Switching	Screen Capture	Previous Track	Play / Pause	Next Track	Mute	Volume Down	Volume Up

Windows / Android / Mac / iOS

OTHER FN SHORTCUTS SWITCH

Shortcuts	Windows	Android	Mac / iOS
fn + [backspace]		Screen Lock	Screen Lock (iOS Only)
fn + [delete]		Pause	
fn + [up arrow]		Device Screen Brightness +	
fn + [down arrow]		Device Screen Brightness -	


Note: The final function refer to the actual system.

DUAL-FUNCTION KEY

Multi-System Layout

Keyboard Layout	Windows / Android (W / A)	Mac / iOS (mac / ios)
fn + [ios] [mac] [P w/a]	Switching Steps: ① Choose iOS layout by pressing FN+I. ② Choose MAC layout by pressing FN+O ③ Choose Windows / Android layout by pressing FN+P.	
ctrl	Ctrl	Control
start	Start	Option
alt cmd	Alt	Command
alt cmd	Alt-Right	Command
ctrl	Ctrl-Right	Option

LOW BATTERY INDICATOR

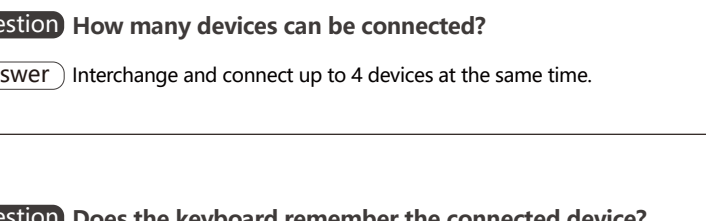

Flashing Red light when the battery is below 10%.

SPECIFICATIONS

Connection: Bluetooth / 2.4GHz
Multi-Device: Bluetooth x 3, 2.4G x 1
Operation Range: 5-10 m
Report Rate: 125 Hz
Character: Laser Engraving
Includes: Keyboard, Nano Receiver, 1 AA Alkaline Battery, Type-C Adaptor, USB Extension Cable, User Manual
System Platform: Windows / Mac / iOS / Chrome / Android / Harmony OS...

Q & A

- Question** How to switch layout under different system?
Answer You can switch layout by pressing FN + I / O / P under Windows | Android | Mac | iOS.
- Question** Does the layout can be remembered?
Answer The layout you used last time will be remembered.
- Question** How many devices can be connected?
Answer Interchange and connect up to 4 devices at the same time.

- Question** Does the keyboard remember the connected device?
Answer The device you connected last time will be remembered.
- Question** How can I know the current device is connected or not?
Answer When you connect on your device, the device indicator will be solid.
(Disconnected: 5S, connected: 10S)
- Question** How to switch between connected Bluetooth device 1-3?
Answer By pressing FN + Bluetooth shortcut (7 - 9).

WARNING STATEMENT

The following actions may damage the product.

1. To disassemble, bump, crush, or throw into fire is forbidden for the battery.
2. Do not expose under the strong sunlight or high temperature.
3. The discard of battery should obey to the local law, if possible please recycle it.
Do not dispose it as household garbage, because it may cause an explosion.
4. Do not continue to use if severe swelling occurs.
5. Please do not charge the battery.

