


WHAT'S IN THE BOX



THE FRONT

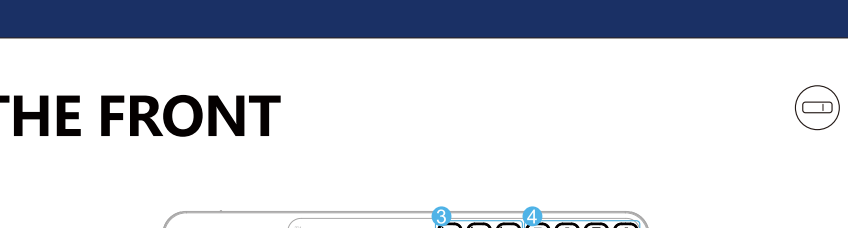


- 1 FN Locking Mode
- 2 12 Multimedia & Internet Hotkeys
- 3 Multi-Device Switch
- 4 One-Touch 4 Hotkeys
- 5 Operating System Swap
- 6 PC/MAC Dual-Function Keys

THE BOTTOM




CONNECTING BLUETOOTH DEVICE 1 (For Mobile Phone/Tablet/Laptop)

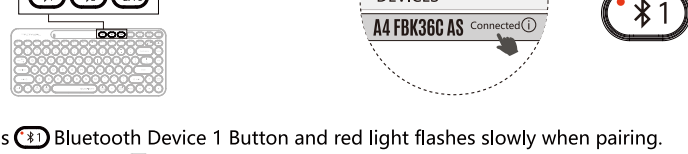


1. Short-press **[BT1]** Bluetooth Device 1 Button and red light flashes slowly when pairing.
(Re-Pairing: Long-press **[BT1]** Bluetooth Device 1 Button for 3S)
2. Choose [A4 FBK36C AS] from your Bluetooth device.
The indicator will be solid red for a while then light off after the keyboard is connected.

CONNECTING BLUETOOTH DEVICE 2 (For Mobile Phone/Tablet/Laptop)

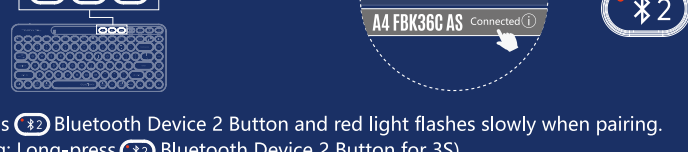

1. Short-press **[BT2]** Bluetooth Device 2 Button and red light flashes slowly when pairing.
(Re-Pairing: Long-press **[BT2]** Bluetooth Device 2 Button for 3S)
2. Choose [A4 FBK36C AS] from your Bluetooth device.
The indicator will be solid red for a while then light off after the keyboard is connected.

CONNECTING 2.4G DEVICE

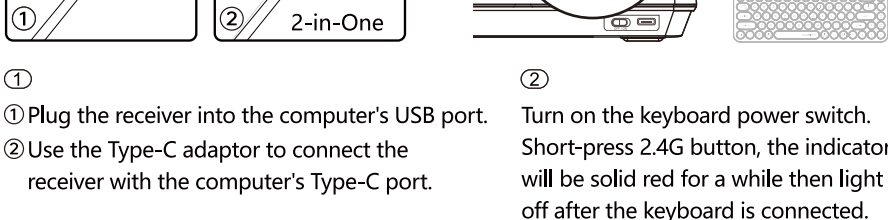

1. Plug the receiver into the computer's USB port.
2. Use the Type-C adaptor to connect the receiver with the computer's Type-C port.

OPERATING SYSTEM SWAP

Windows / Android is default system layout.

System	Shortcut [Long-Press for 3S]	Device / Layout Indicator
iOS	[fn] + [ios]	Light will be off after flashing.
Mac	[fn] + [mac]	
Windows & Android	[fn] + [P/w/a]	

Note: The layout you used last time will be remembered. You can switch the layout by following the above step.

INDICATOR (For Mobile Phone/Tablet/Laptop)

Indicator	Red Light	Red Light	Red Light
Multi-Device Switch	[2.4G]	[BT1]	[BT2]
Device Switch: Short-Press for 1S	Solid Light 5S		
First Pair: Short Press 1S Re-Pair: Long Press 3S	Solid Light 5S	Pairing: Flashes Slowly Connected: Solid Light 10S	

ANTI-SLEEP SETTING MODE


Note: Supports 2.4G Mode Only

To prevent your PC from entering the sleep-mode setting while you are away from your desk, simply turn on our new Anti-Sleep Setting Mode for PC. It will automatically simulate the cursor movement once you turn it on. Now you may take an hour nap while downloading your favorite movie.

Press both the **[fn] + [tab]** buttons for 1s.



ONE-TOUCH 4 HOTKEYS




FN MULTIMEDIA KEY COMBINATION SWITCH

FN Mode: You can lock & unlock FN mode by short pressing FN + ESC by turn.



- 1 Lock FN Mode: No need to press FN key
- 2 Unlock FN Mode: FN + ESC

※ After pairing, FN shortcut is locked in FN mode by default, and the locking FN is memorized when switching and shutting down.

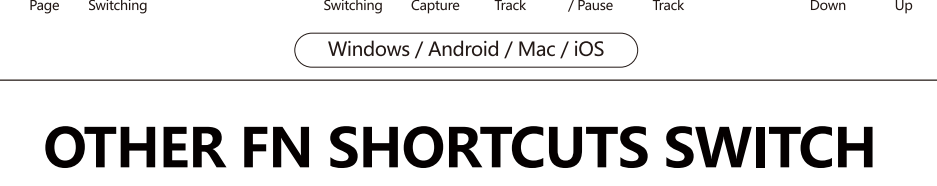

OTHER FN SHORTCUTS SWITCH

Shortcuts	Windows	Android	Mac / iOS
[fn] + [backspace]		Screen Lock	Screen Lock (iOS Only)
[fn] + [delete]	Pause		
[fn] + [▲]	Device Screen Brightness +		
[fn] + [▼]	Device Screen Brightness -		

Note: The final function refer to the actual system.


DUAL-FUNCTION KEY

Multi-System Layout

Keyboard Layout	Windows / Android (W / A)	Mac / iOS (mac / ios)
[fn] + [ios] [mac] [P/w/a]	Switching Steps: ① Choose iOS layout by pressing Fn+I . ② Choose MAC layout by pressing Fn+O . ③ Choose Windows / Android layout by pressing Fn+P .	
[ctrl]	Ctrl	Control ^
[opt]	Start	Option
[alt]	Alt	Command
[cmd]	Alt-Right	Command
[ctrl opt]	Ctrl-Right	Option

CHARGING & INDICATOR

Warning: Limite charge with 5V (Voltage)

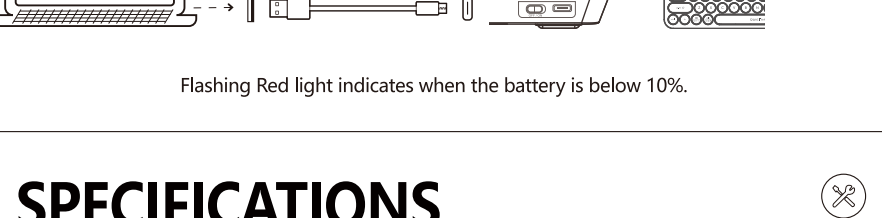

Flashing Red light indicates when the battery is below 10%.

SPECIFICATIONS

Connection: Bluetooth / 2.4GHz
Multi-Device: Bluetooth x 2, 2.4G x 1
Operation Range: 5~10 m
Report Rate: 125 Hz
Character: Laser Engraving
Includes: Keyboard, Nano Receiver, Type-C Adaptor, USB Extension Cable, Type-C Charging Cable, User Manual
System Platform: Windows / Mac / iOS / Chrome / Android / Harmony OS...

Q & A

- Question** How to switch layout under different system?
Answer You can switch layout by pressing **Fn + I / O / P** under Windows | Android | Mac | iOS.
- Question** Does the layout can be remembered?
Answer The layout you used last time will be remembered.
- Question** How many devices can be connected?
Answer Interchange and connect up to 3 devices at the same time.
- Question** Does the keyboard remember the connected device?
Answer The device you connected last time will be remembered.
- Question** How can I know the current device is connected or not?
Answer When you turn on your device, the device indicator will be solid.
(disconnected: 5S, connected: 10S)
- Question** How to switch between connected Bluetooth device 1-2?
Answer By pressing the Bluetooth individual buttons (**[BT1]** **[BT2]**) at the keyboard's top right corner.

WARNING STATEMENT

- The following actions may/will cause damages to the product.
1. To disassemble, bump, crush, or throw into the fire, you may cause irrefutable damages in event of the lithium battery leakage.
 2. Do not expose under the strong sunlight.
 3. Please obey all local laws when discarding the batteries, if possible please recycle them.
Do not dispose of it as household garbage, it may cause a fire or an explosion.
 4. Please try to avoid charging in the environment below 0°C.
 5. Do not remove or replace the battery.
 6. Please use the charging cable included in the package to charge the product.
 7. Do not use any equipment with voltage exceeding 5V for charging.

