



REDRAGON

LUCE

3-MODES CONNECTION
LIGHT-WEIGHT GAMING HEADSET



Please scan here to
download user manual



3-modes connection gaming headset Operating Instructions

US UK

Dear user

Thank you for choosing our REDRAGON product. To protect your rights and for better customer service, we ask that you note our warranty rules.

1. Within guaranty period, repair is guaranteed for failure due to electrical circuit problems. Other damages, such as disassembly, hard impacts, submersion into water, plugging into improper current or voltage, and damage caused by natural disasters such as fire, flood, or earthquake are not included.


2. Consumable parts (such as foot pad) and spare parts replacement are not included in our warranty.

OS Support

Windows XP/Vista/Win7/Win8/Win10/Win11

Packaging List:


- A. Headset -----1 unit
B. Detachable microphone -----1 unit
C. 2.4GHz USB/TYPE-C receiver -----1 unit
D. TYPE-C to USB charging cable -----1 unit
E. TYPE C to 3.5mm cable -----1 unit
F. Battery : lithium battery inside -----1 unit

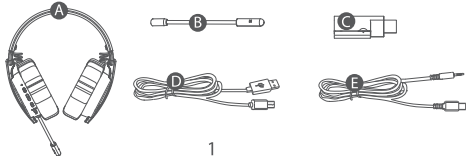

1

Headset button instructions:

- ① LED indicator
② Volume +
③ Power switch (Gaming mode/ Music mode switch)
④ Volume -
⑤ 2.4G/ BT switch
⑥ MIC mute



2

Quick start

2.4GHz wireless connection

[2.4G/ BT switch] on "2.4G" side, press & hold Power Button for 3 seconds, headset notification sound:"adapter mode", plug the USB/TYPE-C receiver to PC USB port or laptop TYPE-C port, the headset will connect to PC/ laptop automatically.

BT connection

[2.4G/ BT switch] on "BT" side, press & hold Power Button for 3 seconds, headset notification sound: "BT mode", turn on your device BT function and searching for device "H888", select the device name, when connection accomplished the headset notification sound: "connected".

Wired connection

Use the TYPE-C to 3.5mm cable connect headset to PC/laptop/mobile, the headset will turn to wired mode.

Power save mode & How to charge

Power save mode

When the headset is un-connected over 5 minutes, the headset will turn off automatically. When the headset is stop play over 10 minutes, the headset will turn off automatically.

How to charge

When the battery is low, the headset notification sound:"battery low", and the LED indicator will flashing RED per minute.

Use TYPE-C to USB cable to connect headset to PC USB port or DC 5V charger. When charging, the LED indicator steady on RED.

Equipment name description

- 1) USB receiver device name: H888 Wireless headset
2) BT mode device name: H888

3

Remark

1. Do not put the headset in humid and wet place.
2. High volume for long period may damage your hearing.
3. Do not put self's strength to pull the cable.

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help
- This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



7

2.4GHz mode			
Buttons/functions /lights	Function description	Operation	Notification sound
2.4G/ BT switch	Switch 2.4G/ BT connection	switching	2.4G mode: Adapter mode BT mode: BT mode
Power button	Power on/off	Power on/off: Press and hold for 3 seconds	Power on/off
	Gaming mode and music mode switching	Press power button twice	Gaming mode/ music mode
	Play / Pause	Press once	
Vol+ button	Turn up volume	Press/Press & hold	Max volume: max volume
	Next track	Press twice	
Vol- button	Turn down volume	Press/Press & hold	
	Previous track	Press twice	
MIC button	Microphone on/mute	Press once	Mic on/ Mic mute
	2.4GHz mode disconnect/repairing	Press twice	
LED indicator	White	Flashing in Red&White when pairing, White steady on after connected	

4

BT mode			
Buttons/functions /lights	Function description	Operation	Notification sound
2.4G/ BT switch	Switch 2.4G/ BT connection	switching	2.4G mode: Adapter mode BT mode: BT mode
Vol+ button	Turn up volume	Press Press and hold	Max volume: max volume
	Next track	Press twice	
Vol- button	Turn down volume	Press Press and hold	
	Previous track	Press twice	
MIC button	Microphone on/ mute	Press once	MIC on/ MIC mute
	BT mode disconnect / repairing	Press twice	
Power button	Power on/off	Power on/off: Press & hold for 3 seconds	Power on/ off
	Play / Pause music	Press once	
	Answer/end the call	Press once	
	Reject the call	Press and hold for 1.5 seconds	Luminous LED default: On
	Gaming mode and music mode switching	Press twice	Gaming mode/ music mode
	SIRI	Press triple times	
LED indicator	Blue	Flashing in Red&Blue when pairing, Blue steady on after connected	

5

List of applicable devices and connection methods are as follows:

List of H888 applicable hosts			
Applicable device	BT mode	2.4GHz mode	Wired mode
Android phone	Y	Y	3.5mm port
Windows laptop	Y	Y	3.5mm port
Windows desktop	Y	Y	3.5mm port
Apple laptop	Y	Y	3.5mm port
Switch	Y	Y TYPE-C support audio output	3.5mm port
PS/3	NA	Y	3.5mm port
PS/4	NA	Y	3.5mm port
PS/5	NA	Y	3.5mm port
XBOX one	NA	NA	3.5mm port

Storage

Headsets should be stored in a clean, dry and ventilated room with an ambient temperature of -5~35°C. Contact with corrosive substances should be avoided, and they should be kept away from fire and heat sources. The headset battery should be charged every six months during storage.

6

BATTERY SAFETY GUIDELINES

DO NOT replace the battery with a different model.

DO NOT use this product if the battery shows signs of damage including, but not limited to tearing, deformation, leakage, or the smell of electrolytic material.

DO NOT touch the battery if material is leaking and seek immediate medical attention if any material comes into contact with your skin or eyes.

DO NOT expose the battery to liquid, heat sources, electricity (outside of the product itself), or other non-standard operating condition.

DO NOT remove the battery except for proper disposal and recycling as required by local laws and regulations.

DO NOT impact, bend, alter, disassemble, or otherwise damage the battery as the contents are volatile, hazardous, and can be harmful.

CAUTION

Failing to follow all safety guidelines may result product damage, explosion, fire, and/or electric shock.

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes: (1) Cet appareil ne doit pas causer d'interférences. (2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement indésirable de l'appareil.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device

8

Modo 2,4GHz			
Botões/funcões/ luzes	Descrição das funções	Operação	Som de notificação
Chave 2.4G/BT	Chave de conexão 2.4G/BT	comutando	Modo 2.4G Modo adaptador Modo BT BT mode
Botão de energia	Ligar/desligar	Ligar/desligar: Pressione e segure por 3 segundos	Ligar/desligar
	Alternância entre modo de jogo e modo de música	Pressione o botão de energia duas vezes	Modo de jogo/ modo de música
	Tocar/Pausa	Pressione uma vez	
Botão Vol+	Aumenta o volume	Pressione/Pressione e segure	Volume máximo: volume máximo
	Próxima faixa	Pressione duas vezes	
Botão Vol-	Diminui o volume	Pressione/Pressione e segure	
	Faixa anterior	Pressione duas vezes	
Botão MIC	Microfone ligado/ mudo	Pressione uma vez	Mic ligado/ Mic Mudo
	Modo 2.4GHz desconectado/ repareando	Pressione duas vezes	Desconectar/pareando
Indicador por LED	Branco	Piscando em vermelho e branco durante o pareamento, branco fixo uma vez conectado	

12

PT

Prezado usuário,

Obrigado por escolher a marca REDRAGON. Para proteger seus direitos e oferecer um melhor atendimento ao cliente, pedimos que você observe as regras da nossa garantia.

1. Dentro do período da garantia, os reparos são garantidos nos casos de falha devido a problemas no circuito elétrico. Danos causados pela desmontagem, por impactos violentos, imersão em água, ligação em correntes ou voltagens incorretas e danos causados por desastres naturais, como incêndios, inundações ou terremotos, não estão incluídos.


2. Peças que sofrem desgaste (como pés) e a substituição de peças avulsas não estão incluídas em nossa garantia.

Compatibilidade com OS

Windows XP/Vista/Win7/Win8/Win10/Win11

Conteúdo da embalagem:


- A. Headset -----1
B. Microfone destacável -----1
C. Receptor de 2.4GHz USB/TIPO-C -----1
D. Cabo de carregamento USB -----1
E. Cabo TIPO C para 3,5 mm -----1
F. Bateria: bateria interna de lítio -----1

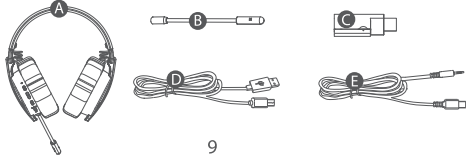

9

Instruções dos botões do headset:

- ① Indicador por LED
② Aumentar o volume
③ Botão de energia (Chave de modo de jogo/música)
④ Reduzir o volume
⑤ Chave 2.4G/BT
⑥ Mic mudo



Início rápido

Conexão sem fio de 2,4 GHz

[Chave 2.4G/BT] no lado "2.4G"/ Pressione e segure o botão de energia por 3 segundos. Som de notificação do fone de ouvido: "adapter mode", conecte o receptor USB/TIPO-C na porta USB do PC ou da porta TIPO-C do notebook. O headset se conectará automaticamente ao PC/laptop.

Conexão com BT

[Chave 2.4G/BT] no lado "BT", pressione e segure o botão de energia por 3 segundos. Som de notificação do fone de ouvido: "BT mode" (modo BT) Ative a função BT do seu dispositivo e procure pelo dispositivo "H888", selecione o nome do dispositivo. Quando a conexão for concluída, o som de notificação do fone de ouvido será: "connected" (conectado).

Conexão com fio

Utilize o cabo TIPO-C para 3,5 mm para conectar o headset ao PC/laptop/celular e o headset passará para o modo com fio.

10

Modo de economia de energia e como carregar

Modo de economia de energia

Se o fone de ouvido ficar desconectado por mais de 5 minutos, vai se desligar automaticamente. Se o fone de ouvido ficar sem uso por mais de 10 minutos, vai se desligar automaticamente.

Como carregar

Se a bateria estiver fraca, o som de notificação do fone de ouvido será: "battery low" (bateria fraca) e LED indicador piscará em VERMELHO a cada minuto. Use o cabo TIPO-C para USB para conectar o headset à porta USB do PC ou ao carregador 5V CC. Durante o carregamento, o LED indicador permanecerá aceso em VERMELHO.

Descrição e nome do equipamento

- 1) Nome do dispositivo receptor USB: Headset sem fio H888
2) Nome do dispositivo no modo BT: H888

11

Modo BT			
Botões/funcões/ luzes	Descrição das funções	Operação	Som de notificação
Chave 2.4G/BT	Chave de conexão 2.4G/BT	comutando	Modo 2.4G Modo adaptador Modo BT BT mode
Botão Vol+	Aumenta o volume	Pressione Pressione e segure	Volume máximo: volume máximo
	Próxima faixa	Pressione duas vezes	
Botão Vol-	Diminui o volume	Pressione Pressione e segure	
	Faixa anterior	Pressione duas vezes	
Botão MIC	Microfone ligado/ mudo	Pressione uma vez	MIC ligado/ MIC Mudo
	Modo BT desconectado/ repareando	Pressione duas vezes	
Botão de energia	Ligar/desligar	Ligar/desligar: Pressione e segure por 3 segundos	Ligar/desligar
	Tocar/pausar música	Pressione uma vez	
	Atender/encerrar a ligação	Pressione uma vez	
	Rejeitar a ligação	Pressione e segure por 1,5 segundos	Luminous LED default: On
	Alternância entre modo de jogo e modo de música	Pressione duas vezes	Modo de jogo/ modo de música
Indicador por LED	SIRI	Pressione três vezes	
	Azul	Piscando em vermelho e azul durante o pareamento, azul fixo uma vez conectado	

13

Lista de dispositivos compatíveis e métodos de conexão a seguir:

Lista de dispositivos compatíveis com o H888			
Dispositivo aplicável	BT mode	Modo 2,4GHz	Modo com fio
Celular Android	Y	Y	Entrada de 3,5 mm
Notebook com Windows	Y	Y	Entrada de 3,5 mm
Computador Windows	Y	Y	Entrada de 3,5 mm
Notebook Apple	Y	Y	Entrada de 3,5 mm
Chave:	Y	Sim, o TIPO-C é compatível com saída de áudio	Entrada de 3,5 mm
PS/3	NA	Y	Entrada de 3,5 mm
PS/4	NA	Y	Entrada de 3,5 mm
PS/5	NA	Y	Entrada de 3,5 mm
Xbox one	NA	NA	Entrada de 3,5 mm

14

Armazenamento

O headset deve ser armazenado em ambiente limpo, seco e ventilado, com temperatura ambiente de -5 a 35 °C. Deve-se evitar o contato com substâncias corrosivas e mantê-lo longe de fontes de fogo e calor. A bateria do headset deve ser carregada uma vez a cada seis meses durante o armazenamento.

Aviso

- 1) Não deixe o headset em local molhado ou úmido.
2) Som em alto volume por períodos prolongados pode afetar sua audição.
3) Não force ao puxar o cabo.



15

型号

ET-9185-H888

名称

英+巴西说明书

日期

2025-7-21

页码

1 OF 1

绘图

杨园园

审核

备注： 尺寸： 100*100MM（折页）

材质： 80g书写纸

印刷： 单黑双面印刷

文件编号

核准

版本

A.1