



## QUICK START GUIDE

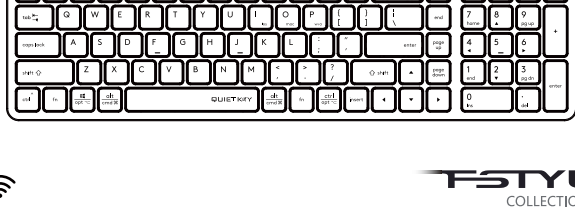

Bluetooth® 2.4G

**F-STYLER**  
COLLECTION

## WHAT'S IN THE BOX

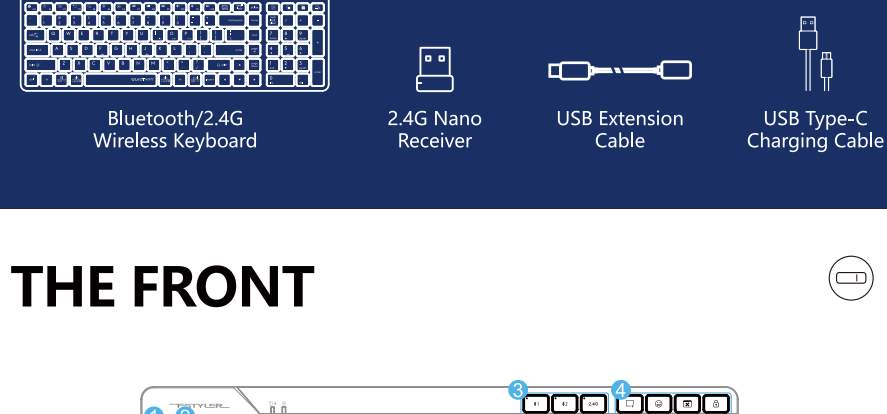

## THE FRONT




- 1 FN Locking Mode
- 2 12 Multimedia & Internet Hotkeys
- 3 Multi-Device Switch
- 4 One-Touch 8 Hotkeys
- 5 Operating System Swap
- 6 PC/MAC Dual-Function Keys

## THE BOTTOM



## CONNECTING BLUETOOTH DEVICE 1 (For Mobile Phone/Tablet/Laptop)

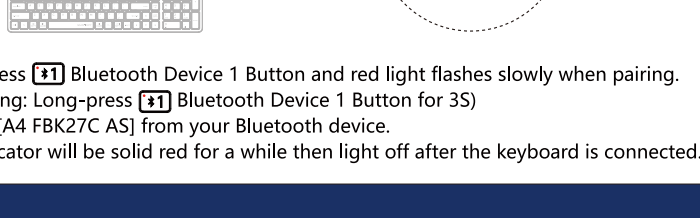


- Short-press [F1] Bluetooth Device 1 Button and red light flashes slowly when pairing. (Re-Pairing: Long-press [F1] Bluetooth Device 1 Button for 3S)
- Choose [A4 FBK27C AS] from your Bluetooth device. The indicator will be solid red for a while then light off after the keyboard is connected.

## CONNECTING BLUETOOTH DEVICE 2 (For Mobile Phone/Tablet/Laptop)



- Short-press [F2] Bluetooth Device 2 Button and red light flashes slowly when pairing. (Re-Pairing: Long-press [F2] Bluetooth Device 2 Button for 3S)
- Choose [A4 FBK27C AS] from your Bluetooth device. The indicator will be solid red for a while then light off after the keyboard is connected.

## CONNECTING 2.4G DEVICE

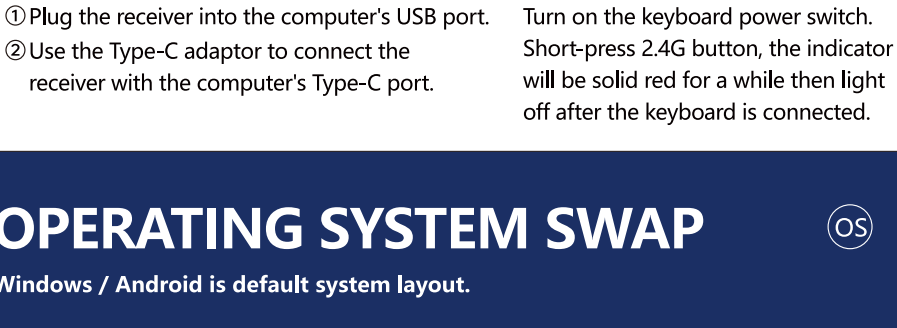

## OPERATING SYSTEM SWAP

Windows / Android is default system layout.

| System            | Shortcut [Long-Press for 3S] | Device / Layout Indicator         |
|-------------------|------------------------------|-----------------------------------|
| iOS               | [fn] + [ios]                 | Light will be off after flashing. |
| Mac               | [fn] + [O mac]               |                                   |
| Windows & Android | [fn] + [P w/a]               |                                   |

Note: The layout you used last time will be remembered. You can switch the layout by following the above step.

## INDICATOR (For Mobile Phone/Tablet/Laptop)

| Indicator                                            | Red Light      | Red Light                                             | Red Light |
|------------------------------------------------------|----------------|-------------------------------------------------------|-----------|
| Multi-Device Switch                                  | [2.4G]         | [F1]                                                  | [F2]      |
| Device Switch: Short-Press for 1S                    | Solid Light 5S |                                                       |           |
| First Pair: Short Press 1S<br>Re-Pair: Long Press 3S | Solid Light 5S | Pairing: Flashes Slowly<br>Connected: Solid Light 10S |           |


## ANTI-SLEEP SETTING MODE

**Note: Supports 2.4G Mode Only**

To prevent your PC from entering the sleep-mode setting while you are away from your desk, simply turn on our new Anti-Sleep Setting Mode for PC. It will automatically simulate the cursor movement once you turn it on. Now you may take an hour nap while downloading your favorite movie.




## ONE-TOUCH 8 HOTKEYS

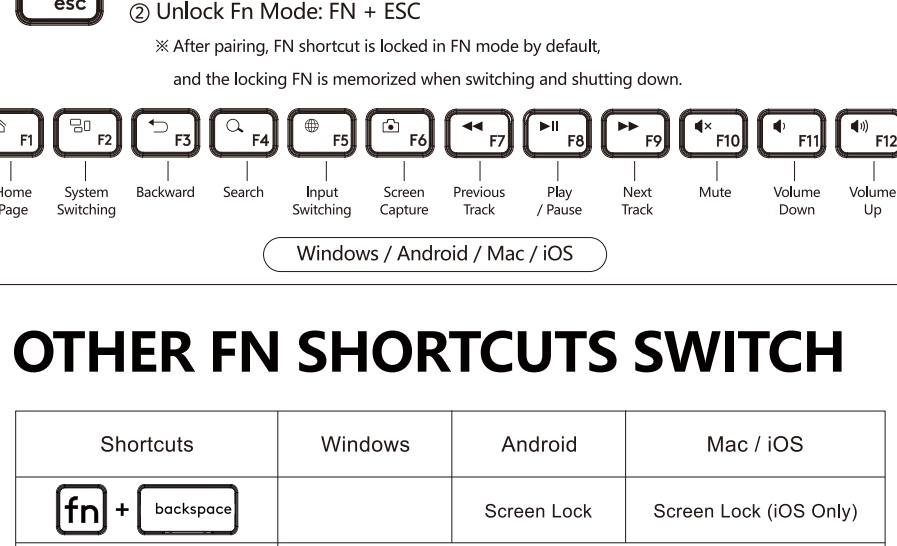

## FN MULTIMEDIA KEY COMBINATION SWITCH

FN Mode: You can lock & unlock Fn mode by short pressing FN + ESC by turn.

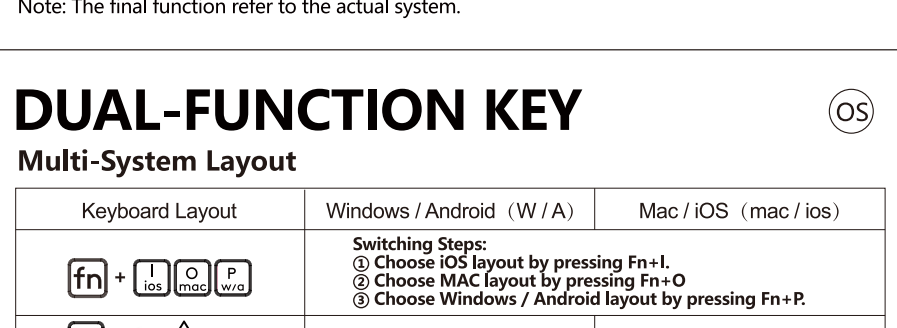

| Shortcuts           | Windows                    | Android     | Mac / iOS              |
|---------------------|----------------------------|-------------|------------------------|
| [fn] + [backspace]  |                            | Screen Lock | Screen Lock (iOS Only) |
| [fn] + [delete]     | Pause                      |             |                        |
| [fn] + [up arrow]   | Device Screen Brightness + |             |                        |
| [fn] + [down arrow] | Device Screen Brightness - |             |                        |

Note: The final function refer to the actual system.

## DUAL-FUNCTION KEY

Multi-System Layout

| Keyboard Layout              | Windows / Android (W / A)                                                                                                                                 | Mac / iOS (mac / ios) |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| [fn] + [ios] [O mac] [P w/a] | Switching Steps:<br>① Choose iOS layout by pressing Fn+I.<br>② Choose MAC layout by pressing Fn+O.<br>③ Choose Windows / Android layout by pressing Fn+P. |                       |
| [ctrl] [ctrl]                | Ctrl                                                                                                                                                      | Control ^             |
| [opt] [opt]                  | Start                                                                                                                                                     | Option                |
| [alt] [alt]                  | Alt                                                                                                                                                       | Command               |
| [alt] [alt]                  | Alt-Right                                                                                                                                                 | Command               |
| [ctrl] [ctrl]                | Ctrl-Right                                                                                                                                                | Option                |

## CHARGING & INDICATOR

**Warning: Limite charge with 5V (Voltage)**



## SPECIFICATIONS

Connection: Bluetooth / 2.4GHz  
Multi-Device: Bluetooth x 2, 2.4G x 1  
Operation Range: 5~10 m  
Report Rate: 125 Hz  
Character: Laser Engraving  
Includes: Keyboard, Nano Receiver, Type-C Adaptor, USB Extension Cable, Type-C Charging Cable, User Manual  
System Platform: Windows / Mac / iOS / Chrome / Android / Harmony OS...

## Q & A

- Question** How to switch layout under different system?  
**Answer** You can switch layout by pressing Fn + I / O / P under Windows | Android | Mac | iOS.
- Question** Does the layout can be remembered?  
**Answer** The layout you used last time will be remembered.
- Question** How many devices can be connected?  
**Answer** Interchange and connect up to 3 devices at the same time.
- Question** Does the keyboard remember the connected device?  
**Answer** The device you connected last time will be remembered.
- Question** How can I know the current device is connected or not?  
**Answer** When you turn on your device, the device indicator will be solid. (disconnected: 5S, connected: 10S)
- Question** How to switch between connected Bluetooth device 1-2?  
**Answer** By pressing the Bluetooth individual buttons ( [F1] [F2] ) at the keyboard's top right corner.

## WARNING STATEMENT

- The following actions may/will cause damages to the product.
- To disassemble, bump, crush, or throw into the fire, you may cause irrefutable damages in event of the lithium battery leakage.
  - Do not expose under the strong sunlight.
  - Please obey all local laws when discarding the batteries, if possible please recycle them. Do not dispose of it as household garbage, it may cause a fire or an explosion.
  - Please try to avoid charging in the environment below 0°C.
  - Do not remove or replace the battery.
  - Please use the charging cable included in the package to charge the product.
  - Do not use any equipment with voltage exceeding 5V for charging.

